



THERMORY[®]
Excellence in Wood

Benchmark Series

Real wood products with beauty and stability in every fiber.

▶ DECKING ▶ CLADDING ▶ PORCH FLOORING




Sophisticated. Simple. Unrivaled.

Thermory naturally enhances each and every board using only heat and steam. Our thermal modification process modifies each fiber, all the way through to the core.

THE RESULT?

Highly rot-resistant real wood products with extraordinary longevity, unrivaled stability, and a rich, beautiful color.

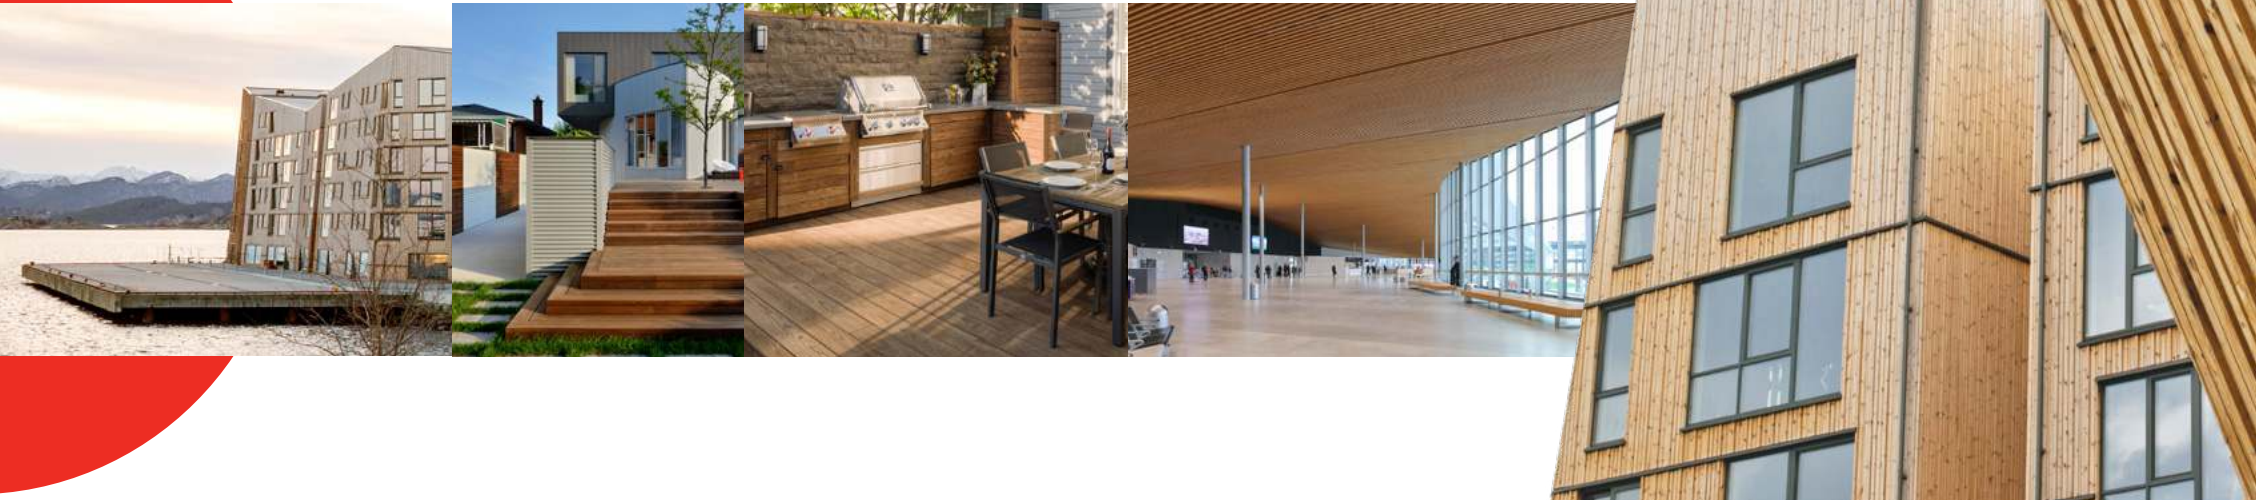

THERMALLY-MODIFIED
White Ash

Northern White Ash (hardwood) sourced in North America & Europe offers a knot-free rich, classic color.



APPLICATIONS

- ▶ DECKING
- ▶ CLADDING
- ▶ PORCH FLOORING

COLOR EVOLUTION

- ▶ Exotic Brown color naturally silvers over time.
- ▶ Aging time varies based on application and climate.
- ▶ Color can be retained by treating with Thermory-recommended oil as-needed.

ASH VS. TROPICAL WOOD

Our thermally-modified ash is comparable to tropical wood in aesthetic and durability. But in a head-to-head matchup, Thermory comes out on top.

	Benchmark WHITE ASH	TROPICAL WOOD	SYNTHETIC*
DURABLE	✓	✓	✓
REAL WOOD	✓	✓	✗
COLOR REJUVENATION	✓	✗	✗
CONSISTENT COLOR	✓	✗	✓
ROT RESISTANT 25+ YEARS	✓	✗	✓
DIMENSIONALLY STABLE	✓	✗	✗
EASY TO INSTALL	✓	✗	✓
LIGHTWEIGHT	✓	✗	✗
NON-TOXIC DUST	✓	✗	✗
JEM JOINT	✓	✗	✗
EARTH-FRIENDLY	✓	✗	✗

*Synthetic wood includes composite and PVC.

THERMALLY-MODIFIED Scots Pine

Scots Pine (softwood) sourced in Scandinavia offers a naturally light color and distinctive knots.



APPLICATIONS

- ▶ DECKING
- ▶ CLADDING

COLOR EVOLUTION

- ▶ Golden Brown color naturally silvers over time.
- ▶ Aging time varies based on application and climate.
- ▶ Color can be retained by treating with Thermory-recommended oil as-needed.

SCOTS PINE VS. CEDAR

Our thermally-modified pine is comparable to cedar in color and durability. But in a head-to-head matchup, Thermory comes out on top.

	Benchmark SCOTS PINE	CEDAR	SYNTHETIC*
DURABLE	✓	✓	✓
REAL WOOD	✓	✓	✗
COLOR REJUVENATION	✓	✗	✗
CONSISTENT COLOR	✓	✗	✓
ROT RESISTANT 20+ YEARS	✓	✗	✓
DIMENSIONALLY STABLE	✓	✗	✗
EASY TO INSTALL	✓	✗	✓
LIGHTWEIGHT	✓	✓	✗
NON-TOXIC DUST	✓	✓	✗
STRONG LENGTH STRUCTURE	✓	✗	✗
EARTH-FRIENDLY	✓	✓	✗

*Synthetic wood includes composite and PVC.



Our Benchmark Series

Our process sets the bar and challenges the industry to **try to keep up.**



One of our thermal modification chambers located in our Estonia factory.



Owning Our Technology

Our proprietary process uses advanced technology and 20,000 sq. ft. chambers to yield consistent, superior results in every batch.



Masterminding The Process

Our wood scientists control our modification process and tirelessly pursue perfection in every board. From temperature to fan speed, each batch is tailored to optimize results.



Creating Superior Products

Our wood scientists and unrivaled process come together to create products that change the landscape of the wood industry - products that offer valuable solutions to the problems you face.

Rot-Resistant

Every fiber of the board is naturally enhanced.

Exceptional Durability

Rot-resistance that few products, exotic or engineered, come close to equaling.

Thermory Takes Testing Seriously

Our products are consistently proven through third-party test results.

Stands Up To Moisture

Our products offer significantly reduced absorbency.



Complete modification of every fiber.

Our process modifies each board completely, all the way through the core, leading to unrivaled durability and stability. At Thermory, we leave no fiber unaltered.

Installation Systems

Exceptional rot-resistance and a stunning aesthetic deserve easy, efficient installation.


B1-B (4")



4" HIDDEN CLIP WITH SCREW

▶ DECKING ▶ ASH

T4 (4") T6 (6")



4" OR 6" HIDDEN CLIP WITH SCREW

▶ DECKING ▶ ASH

PC (6")



6" HIDDEN CLIP WITH SCREW

▶ DECKING ▶ PINE



THE EASIEST, AND POSSIBLY THE FASTEST CLADDING SYSTEM IN THE WORLD!

PaCS (Press and Click Strips) let you easily and quickly install cladding without damaging drill bits or wasting product. Pre-grooved boards for easy alignment and no visible screws.



Just press and click!



JEM Joints

INSTALL DECKING, CLADDING AND PORCH FLOORING WITHOUT BEING HELD HOSTAGE BY JOIST REQUIREMENTS.

Thermory's JEM Joints don't have to rest on joists, drastically reducing waste, labor costs and installation time.



HAVE QUESTIONS? Give us a call. We're nice.



THERMORY
Excellence in Wood

▶ DECKING ▶ CLADDING ▶ PORCH FLOORING

[ThermoryUSA.com](https://www.thermoryusa.com)

BUFFALO

support@thermoryusa.com

P: 585.250.4074 • F: 847.256.0509

14 Jackson Square, Unit #5

Batavia, NY 14020

CHICAGO

support@thermoryusa.com

1213 Wilmette Avenue, Unit #208

Wilmette, IL 60091

DENVER

support@thermoryusa.com

P: 720.759.7268 • F: 847.256.0509

537 W. Highlands Ranch Pkwy, Unit #114
Highlands Ranch, CO 80129